

# Perception <sup>(PTS)</sup> Writanium<sup>®</sup> Porcelain Markerboard



## FOR MARKERBOARDS, CHALKBOARDS AND TACKBOARDS with a Perception Trim System

- Low-profile 1/4" satin anodized face trim with eased edges and a modern scoop tray.
- Writanium<sup>®</sup> porcelain writing surfaces are projection-friendly, accept magnetic accessories, and resist ghosting or staining. Backed by our forever warranty for lasting peace of mind.
- Available in markerboard, chalkboard and tackboard surfaces.
- Ease of installation with concealed hardware.
- Writanium<sup>®</sup> porcelain is SCS Indoor Advantage Gold Certified.

# Suggested Specifications

## Part 1: General

### 1.1 Section Includes

- A. Writanium® Porcelain Markerboards
- B. Writanium® Porcelain Chalkboards
- C. Colored Cork Tackboards
- D. Visual Display Board Accessories

### 1.2 Related Sections

- A. Section 06100 – Wood or Steel Blocking
- B. Section 09000 – Gypsum Wall Board
- C. Section 09720 – Vinyl Wall Coverings
- D. Section 09900 – Paints and Coatings

### 1.3 References

- A. ASTM B221 – Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes.
- B. ASTM E84 – Test Method for Surface Burning and Characteristics of Building Materials.
- C. ASTM C540 – Gloss Test for Writanium® Porcelain (Porcelain Enamel Institute PEI-501).

### 1.4 Submittals

- A. Submit products and samples under provisions of Section 01300.
- B. Product Data: Provide technical data for products specified. Include Material Safety Data Sheets, when applicable.
- C. Shop Drawings: Provide shop drawings for each type of visual display board specified including section details indicating trim, face, core and backing materials, dimensions, joint locations and special anchor details.
- D. Color Samples: Submit set of color chips displaying manufacturer's full range of colors and finishes.
- E. Product Samples: Submit samples not less than twelve inches square and framed on two adjacent sides, to illustrate materials, finish, color, and configuration of each type of visual display board required.
- F. Care and Maintenance Data: Provide data on cleaning requirements, stain removal, and recommended maintenance precautions.

### 1.5 Delivery, Storage, and Handling

- A. Comply with manufacturer's instructions for handling and storage of Visual Display Boards.

### 1.6 Project Conditions

- A. Field measure prior to fabrication to ensure proper fit.
- B. General contractor to maintain proper climate before, during and after installation.

### 1.7 Warranty

- A. Submit manufacturer's "Forever Warranty", stating that under normal usage and maintenance, and when installed in accordance with manufacturer's instructions and recommendations, Writanium® Porcelain Markerboards and Chalkboards are guaranteed for the life of the building.
- B. Warranty shall cover replacement of defective Writanium® Porcelain Markerboards and Chalkboards due to discoloration, excessive fading of color, crazing, cracking or flaking. Warranty does not cover the cost of removal or reinstallation.

# Part 2: Products

## 2.1 Manufacturers

- A. Provide visual display boards as manufactured by Platinum Visual Solutions, Corona, California.  
Tel: (800)498-2990. Fax: (951)817-9900. Email: info@pvsusa.com. Website: www.pvsusa.com
- B. Substitutions: See Section 01600 – Product Requirements

## 2.2 Writanium® Porcelain Markerboards and Chalkboard Materials

- A. Steel Face Sheets: Writing surface will be Writanium® Porcelain 28 gauge steel face with porcelain enamel finish fused to the steel sheet using a continuous coil process.
  - 1. Writanium® Porcelain Markerboard and Chalkboard surface shall be fused at a temperature of 1450° and 1200° respectively.
  - 2. The gloss of the writing surface will not increase more than three units when subjected to wearability tests specified in testing procedures for 30 hours.
- B. Core Material: 7/16" particleboard
- C. Backing Material: 0.05" aluminum backing sheet
- D. Metal Trim and Accessories: 6063 aluminum alloy with a T5 temper
- E. Adhesive: As recommended by manufacturer for project conditions

## 2.3 Writanium® Porcelain Markerboards and Chalkboards

- A. Provide Writanium® Porcelain Markerboards and Chalkboards for project from manufacturer's PTS Series.
  - 1. Metal trim and accessories: PTS Series aluminum extrusions with clear satin anodized finish.
    - a. Frame: Low profile aluminum frame with 1/4" face
    - b. Chalktray: Standard continuous solid chalktray with smoothly curved and polished ends
    - c. Dry Erase Markers: Standard colors (Black, Blue, Green & Red)
    - d. Markerboard Cleaning Cloth: Microfiber magnetic cleaning cloth
  - 2. Size: As shown on drawings
  - 3. Color: As selected from manufacturer's standard colors

## 2.4 Colored Cork Tackboard Materials

- A. Face Sheet: Colored cork surface will be 1/4" resilient homogenous tackable linoleum surface consisting of linseed oil, granulated cork, rosin binders and dry pigments calendared onto natural burlap backing. Color shall extend through thickness of material and be self-healing.
  - 1. The colored cork surface shall be washable with common household cleaner
- B. Core Material: 1/4" MDF hardboard
- C. Metal Trim: 6063 aluminum alloy with T5 temper
- D. Adhesive: As recommended by manufacturer for project conditions

## 2.5 Colored Cork Tackboards

- A. Provide Tackboards for project from manufacturer's PTS Series.
  - 1. Metal trim and accessories: PTS Series aluminum extrusions with clear satin anodized finish.
    - a. Frame CH220: Standard channel frame with 1/4" face
  - 2. Size: As shown on drawings
- B. Color: As selected from manufacturer's standard colors

## 2.6 Fabrication

- A. Laminate facing sheet and backing sheet to core material under pressure, using manufacturer's recommended adhesive.
- B. Provide factory-assembled visual display boards for installation individually or in groupings.
- C. Assemble units in one piece without joints wherever possible.

## Part 3: Execution

### 3.1 Examination

- A. Verify that substrates are properly prepared to receive visual display boards. Do not begin installation until unsatisfactory conditions have been corrected.

### 3.2 Installation


- A. Comply with manufacturer's installation instructions.
- B. Install visual display boards level and plumb, keeping perimeter trim aligned in accordance with manufacturer's recommendations.

### 3.3 Adjusting and Cleaning


- A. Verify that all accessories are installed as required for each unit.
- B. Upon completion of installation, clean surfaces and trim in accordance with manufacturer's recommendations, leaving all materials ready for use.

# PTS: Specifications

## MARKERBOARD / CHALKBOARD

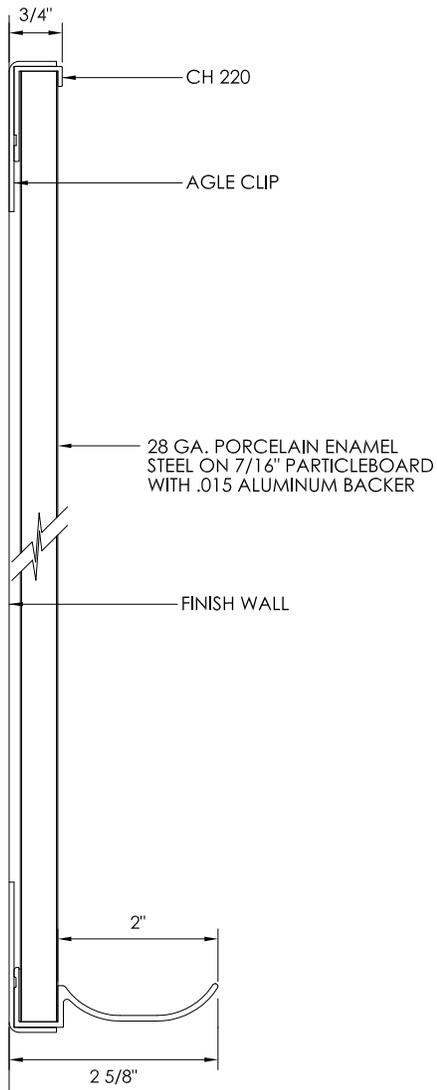

## TACKBOARD

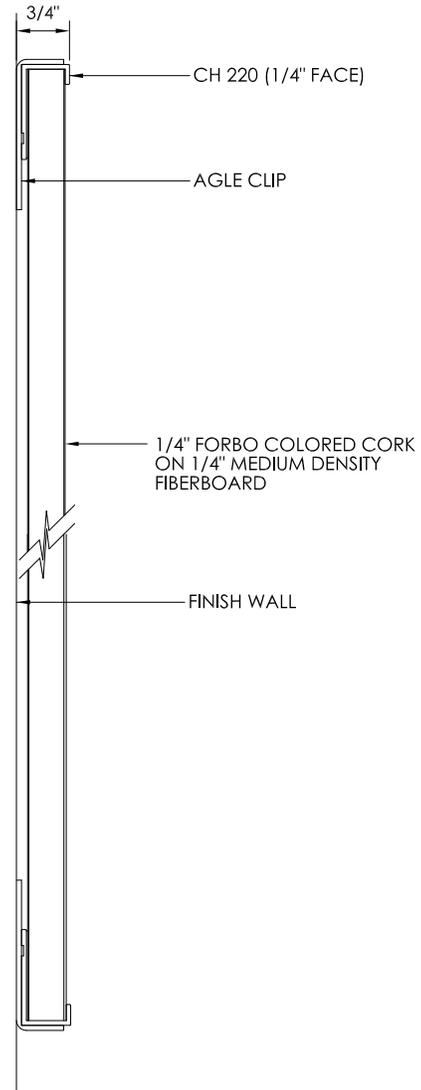



*Platinum*  
VISUAL SOLUTIONS

1451 E. Sixth Street, Corona, CA 92879  
800.498.2990 | 951.817.2200 | FAX 951.817.9900  
info@pvsusa.com | www.pvsusa.com