

# Color Guide: Belair Vinyl Tackable Surfaces



PACIFIC



PLATINUM



COTTON



CHERRY JUBILEE



NATURAL



BLUE SKY



TURQUOISE



MONTEREY JACK



STERLING



ANTIQUE WHITE



PEBBLE BEACH



MOSS



PLATINUM *Imagination made easy.™*

*Note: Color swatches are printed approximations and actual color may vary. If exact match is required, please contact us to request a sample.*

# Specifications

<b>Total Weight</b>	15.0 oz ply 10.0 oz psy
<b>Roll Width</b>	53/55 in
<b>Gauge</b>	0.025 in
<b>Fabric</b>	Sheeting
<b>Tensile (Minimum)</b>	40 x 30 lbf
<b>Tear (Minimum)</b>	14 x 12
<b>Federal Spec</b>	CCC-W-408A, Type I
<b>CFFA Spec</b>	CFFA-W-101D, Type I
<b>Fire Testing</b>	NFPA 101® Life Safety Code® NFPA 255 (UL723, CAN S102M) Tunnel Test, Class A Rating NFPA 286 Corner Burn Test <sub>2</sub> Meets requirements for Flame Spread, Smoke Developed and Flashover U.L. Labeled and Listed

1 When applied to GRC board with A-848-B adhesive

2 When applied to 5/8" type-X gypsum board with A-848-B adhesive



**COLORATION:** The colors selected for this product resulted from research within the A & D community on color needs and trends for coordinations with the latest in carpeting, laminates, furniture and contract fabrics



**PLATINUM**  
LET'S CREATE TOGETHER.™



1451 E. Sixth Street, Corona, CA 92879  
800 498 2990 | 951 817 2200 | FAX 951 817 9900  
[www.pvsusa.com](http://www.pvsusa.com) | [info@pvsusa.com](mailto:info@pvsusa.com)

# Color Guide: Harborweave Vinyl Tackable Surfaces



ATRIUM



MOONLIGHT



WINTER MIST



ROCKPORT



SEA MIST




DUCK



LIGHT DIONIS



GREY FEATHER

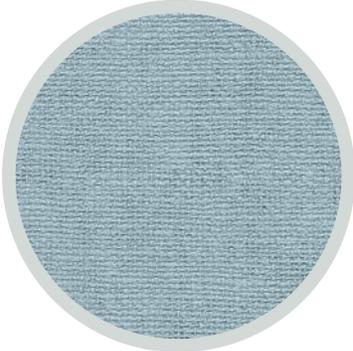

BREAKWATER



SCARBOROUGH



DESERT SHORE



SUNBURY

# Specifications

	HARBORWEAVE I	HARBORWEAVE II – OPTIONAL
<b>Total Weight</b>	18.0 oz ply 12.0 oz psy	21.0 oz ply 14.0 oz psy
<b>Roll Width</b>	53/54 in	53/54 in
<b>Gauge</b>	8.5 Mils	9 Mils
<b>Fabric</b>	Sheeting	Osnaburg
<b>Tensile (Minimum)</b>	40 x 30 lbf	50 x 55 lbf
<b>Tear (Minimum)</b>	14 x 12	25 x 25
<b>Federal Spec</b>	CCC-W-408A, Type I	CCC-W-408A, Type II
<b>WA Spec</b>	WA-101, Type I	WA-101, Type II
<b>Fire Testing</b>	NFPA 101® Life Safety Code® NFPA 255 (UL723, CAN S102M) Tunnel Test <sub>1</sub> Class A Rating NFPA 286 Corner Burn Test <sub>2</sub> Meets requirements for Flame Spread, Smoke Developed and Flashover	

1 When applied to GRC board with A-848-B adhesive

2 When applied to 5/8" type-X gypsum board with A-848-B adhesive



COLORATION: The colors selected for this product resulted from research within the A & D community on color needs and trends for coordinations with the latest in carpeting, laminates, furniture and contract fabrics



**PLATINUM**  
LET'S CREATE TOGETHER.™



1451 E. Sixth Street, Corona, CA 92879  
 800 498 2990 | 951 817 2200 | FAX 951 817 9900  
[www.pvsusa.com](http://www.pvsusa.com) | [info@pvsusa.com](mailto:info@pvsusa.com)

# Color Guide: Ceres Vinyl Tackable Surfaces



WHITE SAND



STUCCO



TERN



MIST



SOLITUDE



CREME BRULEE




CREME



COBBLESTONE



FOG

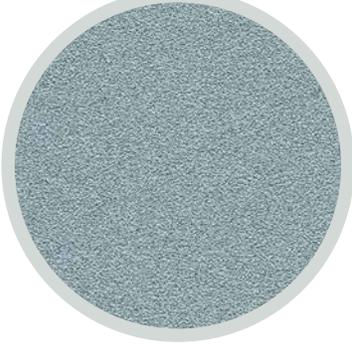

COUNTRYSTONE



EGGSHELL



HEMP

# Specifications

<b>Total Weight</b>	21.0 oz ply 14.0 oz psy
<b>Roll Width</b>	53/55 in
<b>Gauge</b>	26 mils
<b>Fabric</b>	Osnaburg
<b>Tensile (Minimum)</b>	50 x 55 lbf
<b>Tear (Minimum)</b>	25 x 25
<b>Federal Spec</b>	CCC-W-408A, Type II
<b>CFFA Spec</b>	CFFA-W-101D, Type II
<b>Fire Testing</b>	NFPA 101® Life Safety Code® NFPA 255 (UL723, CAN S102M) Tunnel Test <sub>1</sub> Class A Rating NFPA 286 Corner Burn Test <sub>2</sub> Meets requirements for Flame Spread, Smoke Developed and Flashover U.L. Labeled and Listed

1 When applied to GRC board with A-848-B adhesive

2 When applied to 5/8" type-X gypsum board with A-848-B adhesive



**COLORATION:** The colors selected for this product resulted from research within the A & D community on color needs and trends for coordinations with the latest in carpeting, laminates, furniture and contract fabrics



**PLATINUM**  
LET'S CREATE TOGETHER.™



1451 E. Sixth Street, Corona, CA 92879  
800 498 2990 | 951 817 2200 | FAX 951 817 9900  
[www.pvsusa.com](http://www.pvsusa.com) | [info@pvsusa.com](mailto:info@pvsusa.com)

# Color Guide: Spellbound Vinyl Tackable Surfaces



WHISPERS



APOLLO



CHANT



DELTA



DOBBY



KISMET



SOL



DESTINY



AVANTE GARDE



DOVETAIL



MERLIN



WILLOW



# Specifications

<b>Total Weight</b>	21.0 oz ply 14.0 oz psy
<b>Roll Width</b>	52/54 in
<b>Gauge</b>	27 mils
<b>Fabric</b>	Osnaburg
<b>Tensile (Minimum)</b>	50 x 55 lbf
<b>Tear (Minimum)</b>	25 x 25
<b>Federal Spec</b>	CCC-W-408A, Type II
<b>CFFA Spec</b>	CFFA-W-101D, Type II
<b>Fire Testing</b>	NFPA 101® Life Safety Code® NFPA 255 (UL723, CAN S102M) Tunnel Test <sub>1</sub> Class A Rating NFPA 286 Corner Burn Test <sub>2</sub> Meets requirements for Flame Spread, Smoke Developed and Flashover U.L. Labeled and Listed

1 When applied to GRC board with A-848-B adhesive

2 When applied to 5/8" type-X gypsum board with A-848-B adhesive



**COLORATION:** The colors selected for this product resulted from research within the A & D community on color needs and trends for coordinations with the latest in carpeting, laminates, furniture and contract fabrics



**PLATINUM**  
LET'S CREATE TOGETHER.™



1451 E. Sixth Street, Corona, CA 92879  
800 498 2990 | 951 817 2200 | FAX 951 817 9900  
[www.pvsusa.com](http://www.pvsusa.com) | [info@pvsusa.com](mailto:info@pvsusa.com)