
Platinum Fabric

Pin Surfaces Color Guide





| Platinum Fabric Specifications

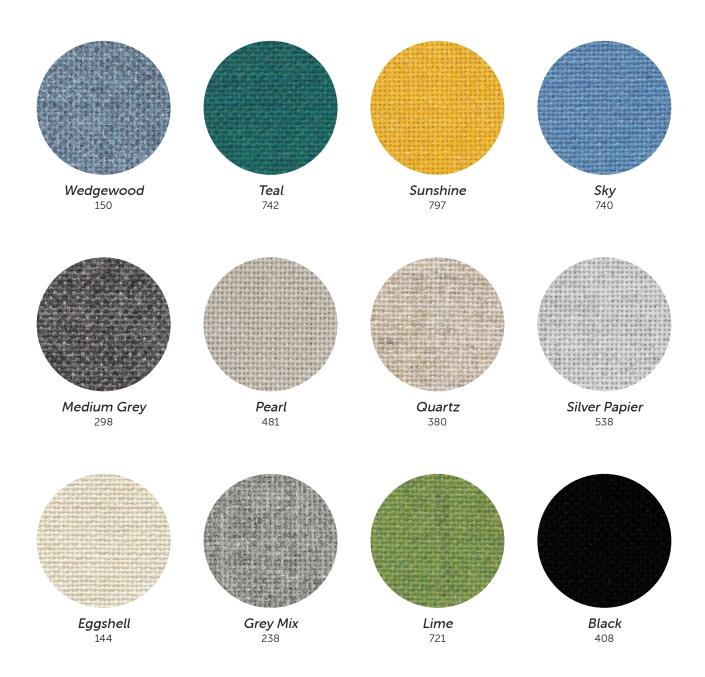


Acoustic fabric pin surfaces that are both bleach cleanable and recycled.

Content	100% Post Consumer Recycled Polyester
Weight	16.0 ± 0.5 Oz./Lin. Yd.
Width	66" Min. Usable
Repeat	None
Cleaning code	Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.
Bleach Cleanable	May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.
Miscellaneous	Application testing of this product is recommended. Colors may vary between dye lots. This is a non- directional fabric. Proudly woven in North America supporting our local communities.
Sustainability	100% recycled and recyclable
Acoustical Performance	Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.
Acoustic Transparency	95%
Performance	
*	Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
•	Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
*	Breaking Strength (ASTM D5034) 150 lbf min. warp and fill
	Flammability ASTM E84 Class I or A

Acoustical Performance

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

Acoustical Performance for Panel Applications (ISO 10534-2)



NRC of anechoic termination

1.00

NRC of fabric in front of anechoic termination .95



Terratex is a registered trademark of Duvaltex and designates fabrics that are made from 100% recycled or compostable material using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.